


4183 



FRAME

Mass-dyed thermoplastic technopolymer

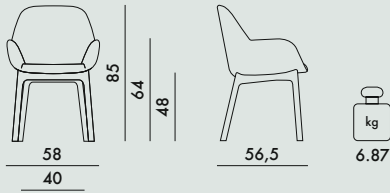

SEAT

PVC-coated fabric




Fire tested version

IT UNI 9175, EN1021 fire reaction test class 1 IM ministerial certification
 MI1848D20D1IM00021
 UK Standard BS 7176 Medium Hazard - S.I. 1324
 US - California Standard TB 117



EN 1022 2005	Compliant
EN 16139 2013	Compliant
EN 1728:2012	level reached
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2



4183

1	6.73	0.161	54X49X61
1	3.97	0.120	51X51X46